


MS08-辦公室電力柱

MS08 connection column


- Closed aluminium profile
- Plastic cover
- Bottom plate (plastic or aluminium)
- 80x70x 200/300 mm
- 1 or 2-side assembly
- 2 or 3 mounting holes
- IPX0
- Special dimensions on request

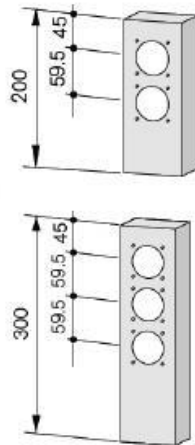

MS12 – 辦公室電力柱

MS12

- Open aluminium profile
- Aluminium cover (lid)
- Floor fixation (option: floor socket)
- 120 x 65 x 340/507 mm
- Single side assembly
- IPX0





MS240 – 辦公室用電力柱

MS240: samples



MS10/MSD10-開放空間電力柱

MS10 / MSD10

- Closed aluminium profile
- Plastic cover
- Floor- /Ceiling fixation
- 100 x 50 x h mm
- Single side assembly
- Colors: silver anodized
poder coated black/white
- IPX0 and IPX5



Standard heights (h):

- MS10 200,300,500,1150 mm
- MSD10 2700,3000mm



MS15/MSD15 - 廠房用電力柱

MS15 / MSD15 : samples



MS165 - 廠房用電力柱

MS165: samples





MS300 - 廠房用電力柱

MS300: samples



MS12/MSDR12 – 複合式電力柱

MSR12 / MSDR12: samples





Thank you for your attention

