


Wall mounted plugs

Wall mounted plug IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a	120	121	122	131	131	132
b	76	76	79	82	82	85
M	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm ²]	1-2,5			2,5-6		
solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	173	188	205	212	232	253

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6v
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

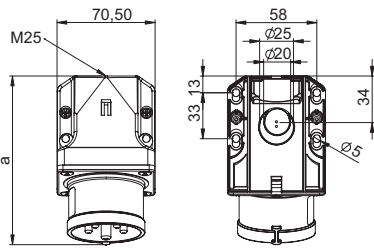


b=height
angle=15°

Turbo Twist Wall mounted plug IP44

	16 Amp		32 Amp	
	3	5	4	5
Poles	3	5	4	5
a	120	122	131	132
b	76	79	82	85
M	25	25	25	25
Connection type: Screwless terminal				
Wire flexible [mm ²]	1-2,5		2,5-6	
solid [mm ²]	1-4		2,5-10	
Weight [g]	176	209	238	261

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6TTv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

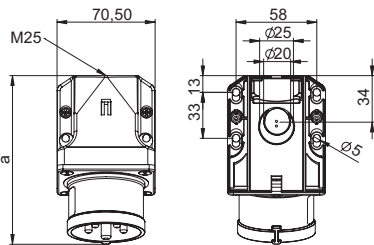


b=height
angle=15°

Wall mounted plug with lid IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a	127	128	128	137	137	140
b	92	94	97	99	99	104
M	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm ²]	1-2,5			2,5-6		
solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	230	245	263	272	292	315

- with screw terminals
- with hinged lid, to increase protection
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6dv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

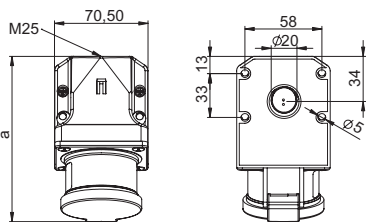


b=height
angle=15°

Wall mounted plug with lid IP44

	16 Amp		32 Amp	
	5	5	5	5
Pole s	5	5	5	5
a	141	151	151	151
b	99	112	112	112
M*	25	25	25	25
Connection type: Screw terminal				
Wire flexible [mm ²]	1-2,5		2,5-6	
solid [mm ²]	1-4		2,5-10	
Contact screws [Ncm]	100 Ncm		110 Ncm	
Weight [g]	257		310	

- with screw terminals
- **one-piece housing**
- with hinged lid, to increase protection
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 515-6kdv
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

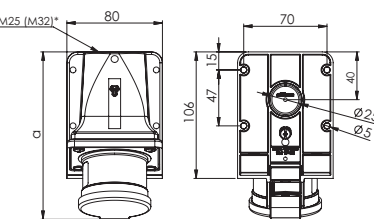


b=height
angle=15°

*M32 optional on request available

Amp.	Poles	pack. unit	110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50- 500V~ 100-300Hz 10h	>50- 500V~ 301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

16	3	10	513-4	513-6	513-9	513-7	513-10	513-2
16	4	10	514-4	514-9	514-6	514-7	514-10	514-2
16	5	10	515-4	515-9	515-6	515-7	515-10	515-2
32	3	10	523-4	523-6	523-9	523-7	523-10	523-2
32	4	10	524-4	524-9	524-6	524-7	524-10	524-2
32	5	10	525-4	525-9	525-6	525-7	525-10	525-2

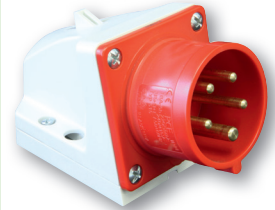

515-6

16	3	10	513-4TT	513-6TT	513-9TT			
16	5	10	515-4TT	515-9TT	515-6TT			
32	4	10	524-4TT	524-9TT	524-6TT			
32	5	10	525-4TT	525-9TT	525-6TT			



515-6TT

16	3	10	513-4d	513-6d	513-9d	513-7d	513-10d	513-2d
16	4	10	514-4d	514-9d	514-6d	514-7d	514-10d	514-2d
16	5	10	515-4d	515-9d	515-6d	515-7d	515-10d	515-2d
32	3	10	523-4d	523-6d	523-9d	523-7d	523-10d	523-2d
32	4	10	524-4d	524-9d	524-6d	524-7d	524-10d	524-2d
32	5	10	525-4d	525-9d	525-6d	525-7d	525-10d	525-2d



515-6d


16	5	10	515-4kd	515-9kd	515-6kd	515-7kd	515-10kd	515-2kd
32	5	10	525-4kd	525-9kd	525-6kd	525-7kd	525-10kd	525-2kd



525-6kd



Wall mounted plugs

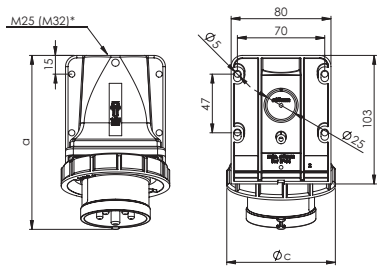

b=height
angle=15°


Wall mounted plug IP67

	16 Amp			32 Amp		
	3	4	5	4	5	5
a	136	138	140	150	153	152
b	99	94	100	104	104	102
c	71	79	87	93	93	102
M	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm ²]	1-2,5			2,5-6		
solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	200	223	242	260	280	306

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a „v“ e.g. 5152-6kv
- top, or rear entry

IP67 watertight

*M32 optional on request available

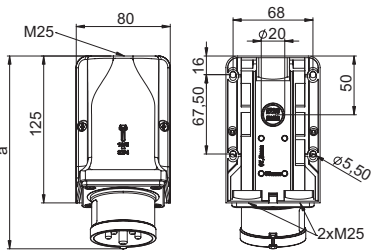


b=height
angle=15°

Wall mounted plug IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
a	163	163	164	173	173	174
b	109	109	112	115	115	118
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm ²]	1-2,5			2,5-6		
solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	263	278	295	302	322	341

- with screw terminals
- for wiring through
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 9515-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

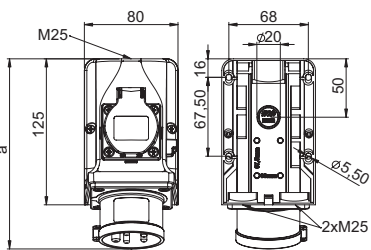


b=height
angle=15°

Wall mounted plug - COMBO IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
a	162	162	163	172	172	173
b	117	117	117	117	117	118
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm ²]	1-2,5			2,5-6		
solid [mm ²]	1-4			2,5-10		
Contact screws CEE [Ncm]	100 Ncm			110 Ncm		
Screw terminals [Ncm]	120 Ncm					
Weight [g]	367	382	399	422	442	463

- with screw terminals
- wall mounted plug with integrated safety socket acc. Austr./Germ. system
- connecting terminals up to 10mm²
- **ready wired**
- for plug 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 95215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet
- special design with Belg./French socket outlet or non wired version are available on request

IP44 splashproof

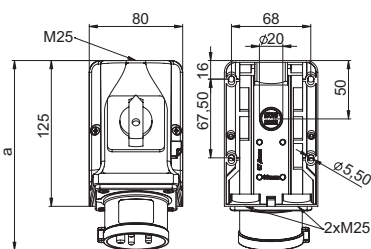

b=height
angle=15°

Wall mounted plug with switch IP44

	16 Amp	32 Amp
	Poles	5
a	163	173
b	128	128
M	3x25	3x25
Connection type: Screw terminal		
Wire flexible [mm ²]	1-2,5	2,5-6
solid [mm ²]	1-4	2,5-10
Weight [g]	474	522

- with screw terminals
- wall mounting plug with integrated ON/OFF switch AC22A
- **prewired**
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 75615-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

Amp.	Poles	pack. unit	110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50- 500V~ 100-300Hz 10h	>50- 500V~ 301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

16	3	5	5132-4k	5132-6k	5132-9k	5132-7k	5132-10k	5132-2k
16	4	5	5142-4k	5142-9k	5142-6k	5142-7k	5142-10k	5142-2k
16	5	5	5152-4k	5152-9k	5152-6k	5152-7k	5152-10k	5152-2k
32	3	5	5232-4k	5232-6k	5232-9k	5232-7k	5232-10k	5232-2k
32	4	5	5242-4k	5242-9k	5242-6k	5242-7k	5242-10k	5242-2k
32	5	5	5252-4k	5252-9k	5252-6k	5252-7k	5252-10k	5252-2k



5252-6k

16	3	5	9513-4	9513-6	9513-9	9513-7	9513-10	9513-2
16	4	5	9514-4	9514-9	9514-6	9514-7	9514-10	9514-2
16	5	5	9515-4	9515-9	9515-6	9515-7	9515-10	9515-2
32	3	5	9523-4	9523-6	9523-9	9523-7	9523-10	9523-2
32	4	5	9524-4	9524-9	9524-6	9524-7	9524-10	9524-2
32	5	5	9525-4	9525-9	9525-6	9525-7	9525-10	9525-2



9515-6

16	3	5		95213-6				
16	4	5		95214-9	95214-6			
16	5	5			95215-6			
32	3	5		95223-6				
32	4	5		95224-9	95224-6			
32	5	5			95225-6			



95225-6



95215-6


16	5	5						75615-6
32	5	5						75625-6



75615-6

Wall mounted plugs

Power Twist Wall mounted plug IP66/67

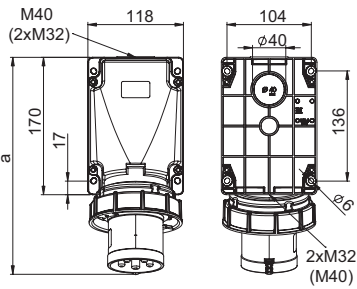


b=height
angle=15°

	63 Amp		
Poles	3	4	5
a	271	271	271
b	175	175	175
Connection type: Contact frame with screws			
Wire flexible [mm ²]	6-16		
solid [mm ²]	6-25		
Contact screws [Ncm]	200 Ncm		
Weight [g]	812	864	914

- contact frame with screws
- housing material: PC/ABS
- contacts: nickel-plated contacts, with pilot contact (see page 10)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- for waterproof cover and cable-glands see accessories page 51

IP66/67 watertight

Power Twist Wall mounted plug IP66/67

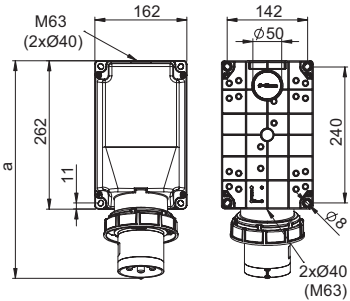


b=height
angle=15°

	125 Amp		
Poles	3	4	5
a	387	387	387
b	209	209	209
Connection type: Contact frame with screws			
Wire flexible [mm ²]	16-50		
solid [mm ²]	16-70		
Contact screws [Ncm]	450 Ncm		
Weight [g]	1620	1725	1834

- contact frame with hexagon socket screws
- housing material: PC/ABS
- contacts: nickel-plated contacts, with pilot contact (see page 10)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- for waterproof cover and cable-glands see accessories page 51

IP66/67 watertight

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
63	3	2	533-4	533-6	533-9	533-7	533-10	533-2
63	4	2	534-4	534-9	534-6	534-7	534-10	534-2
63	5	2	535-4	535-9	535-6	535-7	535-10	535-2



535-6

125	3	1	543-4	543-6	543-9	543-7	543-10	543-2
125	4	1	544-4	544-9	544-6	544-7	544-10	544-2
125	5	1	545-4	545-9	545-6	545-7	545-10	545-2



545-6

Accessories see page 51

POWER TWIST

